



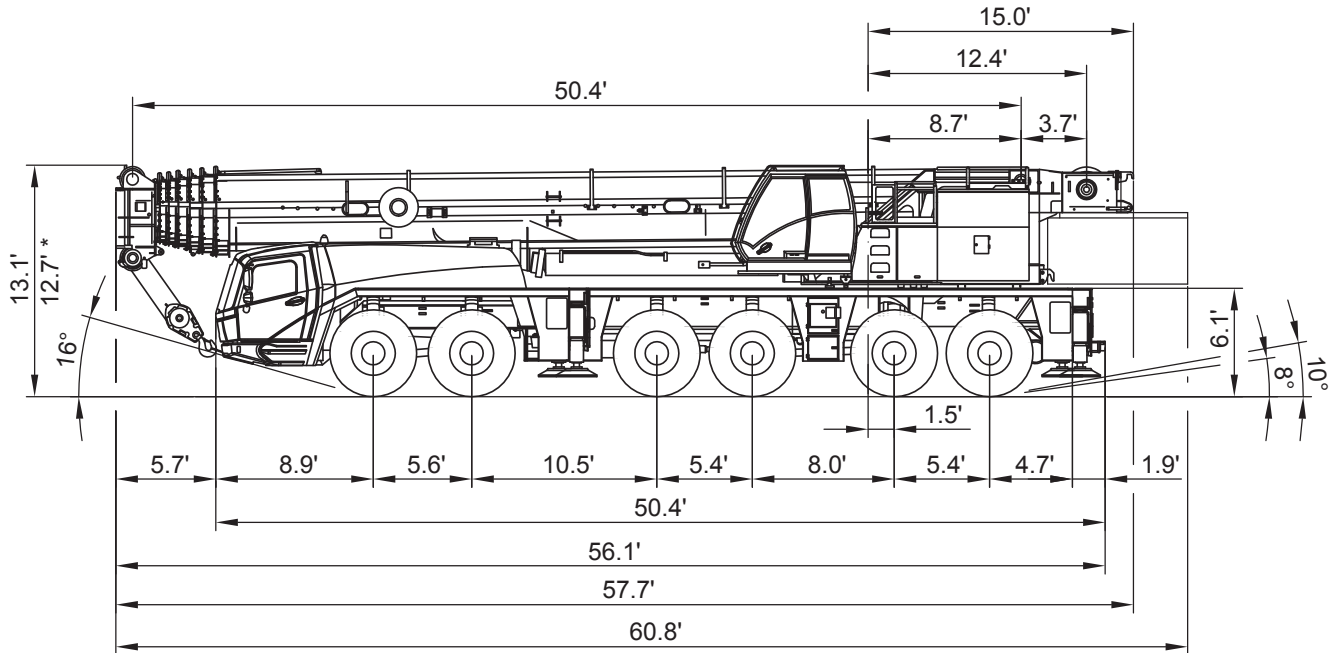


* = lowered

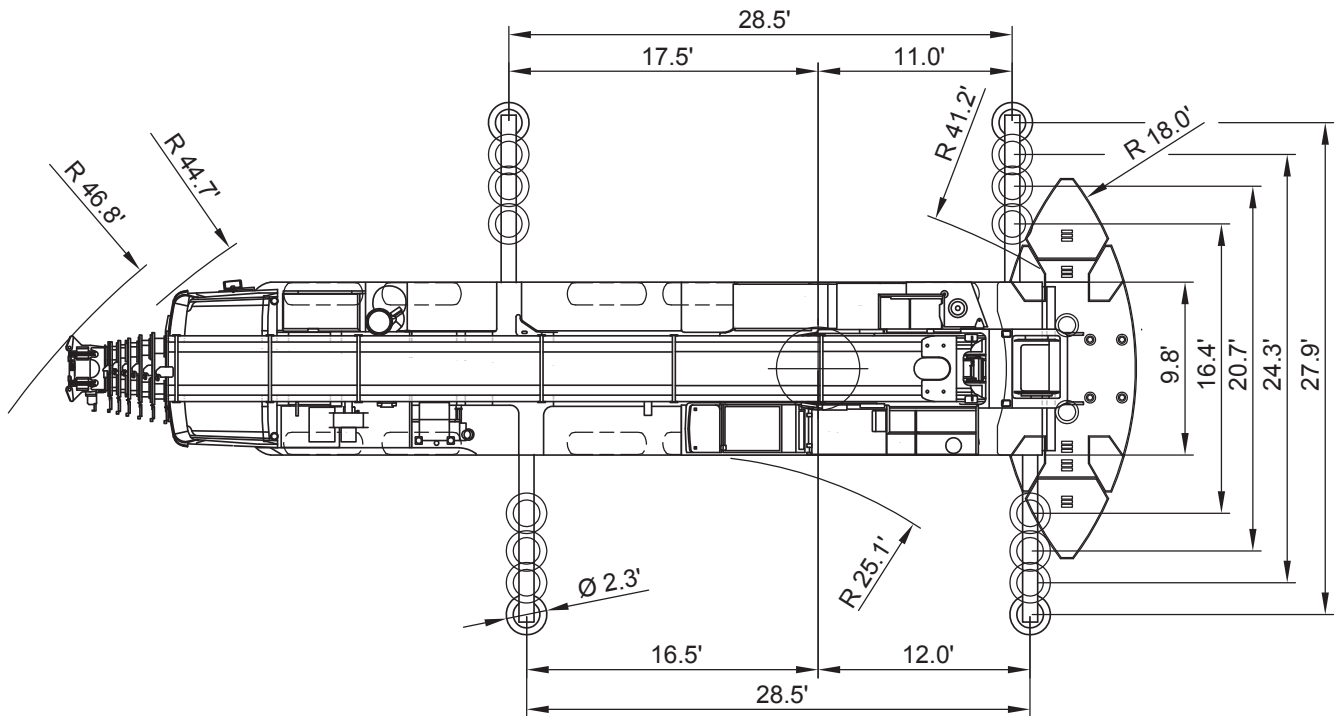

Load Blocks	Capacity	Sheaves	Weight
	125.0 tons	5	3,638 lbs
	80.0 tons	3	2,094 lbs
	32.0 tons	1	1,323 lbs
	12.0 tons	-	661 lbs

Line pull	Tail swing	Outrigger pads
24,700 lbs	18'	2.3'

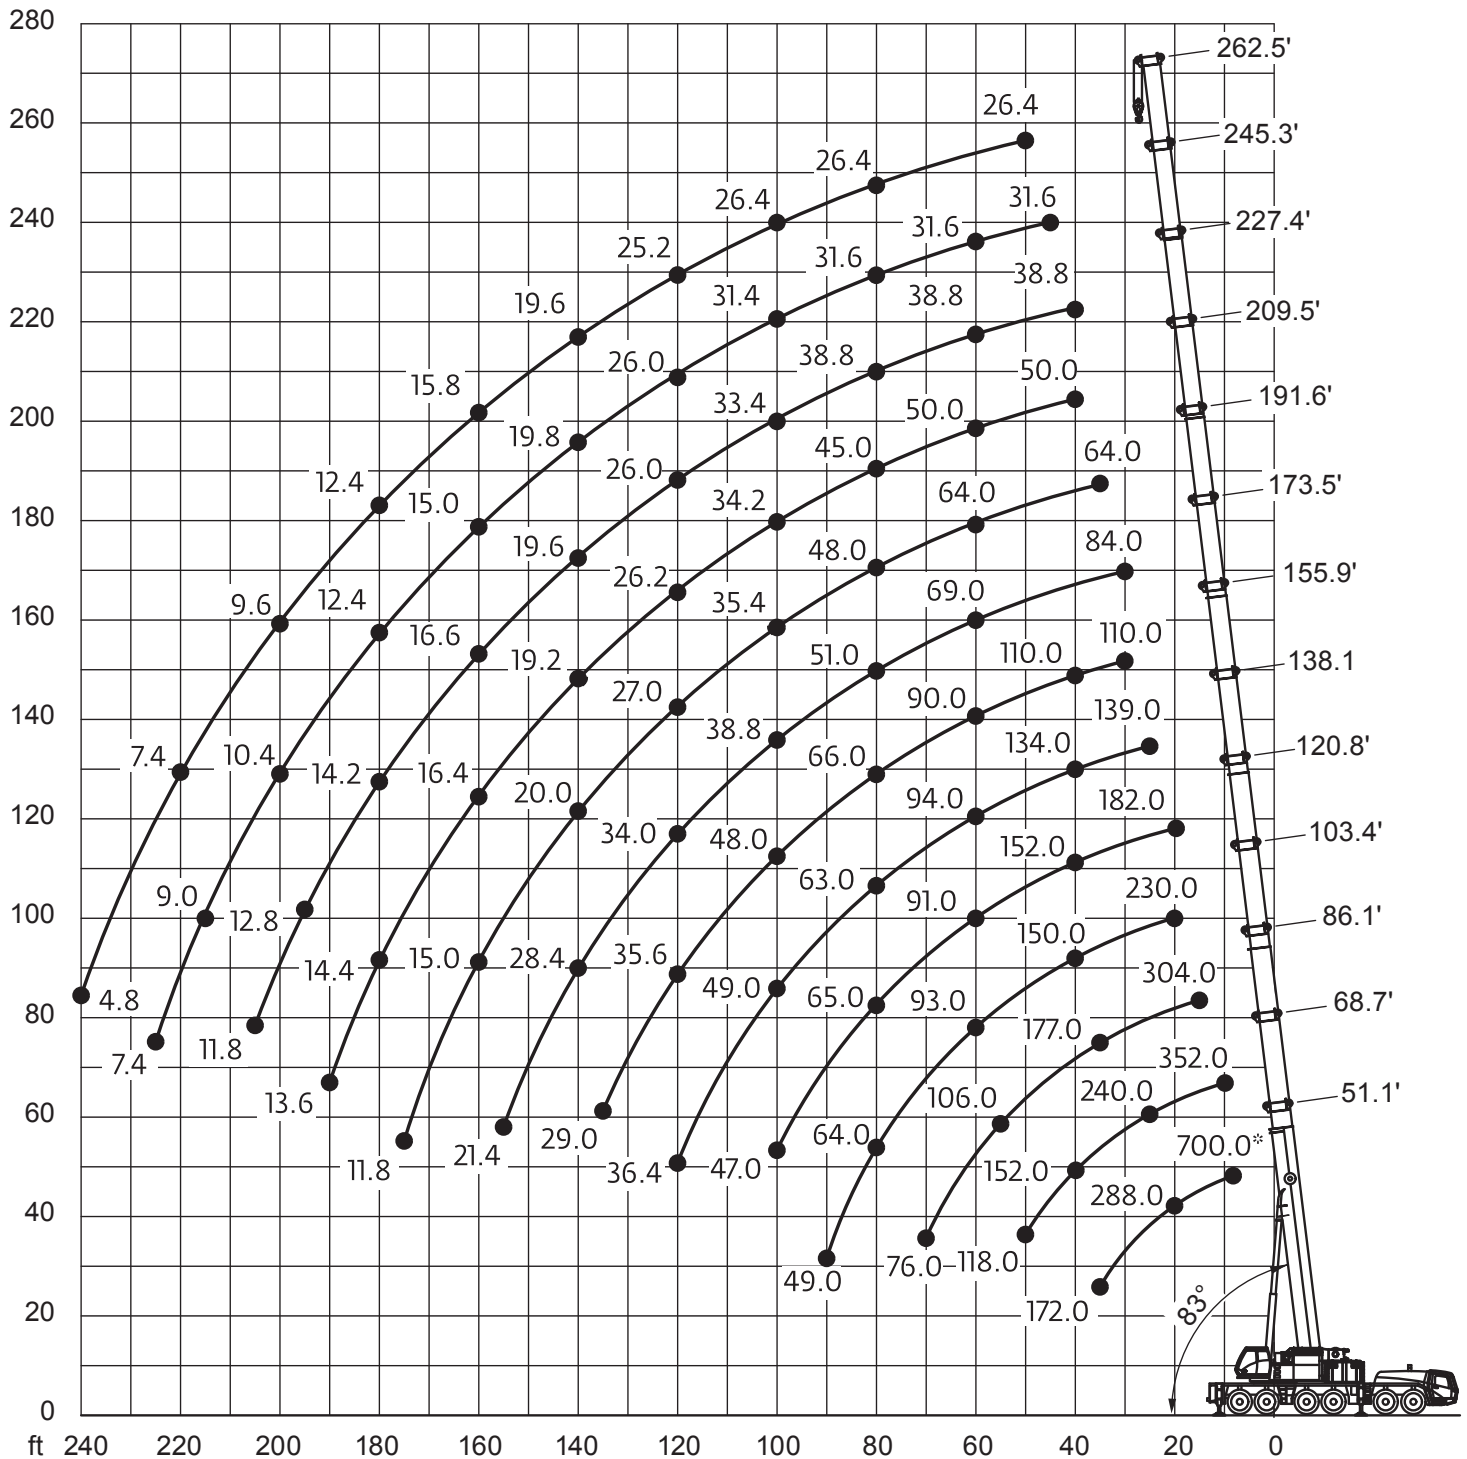



51.1-262.5 ft



203,900 lbs



28'5"x27'9"



360°



85

85%

ft	51.1	68.7	86.1	103.4	120.8	138.1	155.9	173.5	191.6	209.5	227.4	245.3	262.5	ft
8	700*													8
10	418	352												10
15	348	324	304											15
20	288	276	260	230	182									20
25	244	240	230	217	178	139								25
30	207	207	202	192	178	139	110	84						30
35	172	178	177	171	167	139	110	84	64					35
40		152	152	150	152	134	110	84	64	50	38.8			40
45		134	132	130	132	124	106	84	64	50	38.8	31.6		45
50		118	118	116	116	115	101	81	64	50	38.8	31.6	26.4	50
55			106	105	103	105	95	75	64	50	38.8	31.6	26.4	55
60			94	93	91	94	90	69	64	50	38.8	31.6	26.4	60
65			85	84	82	84	84	64	59	50	38.8	31.6	26.4	65
70			76	76	76	76	79	59	55	50	38.8	31.6	26.4	70
75				69	71	69	72	55	52	48	38.8	31.6	26.4	75
80				64	65	63	66	51	48	45	38.8	31.6	26.4	80
85				61	60	58	60	47	44	42.4	38.8	31.6	26.4	85
90				49	55	55	56	43.2	40.6	39.4	37.2	31.6	26.4	90
95					51	52	51	40.4	37.8	36.6	35.4	31.6	26.4	95
100					47	49	48	38.8	35.4	34.2	33.4	31.4	26.4	100
105						46	44	37.4	32.8	31.8	31.6	30	26.4	105
110						43	41	36.2	30.8	30	29.6	28.8	26.4	110
115						40.2	38.2	35	28.8	28	27.8	27.4	26.4	115
120						36.4	35.6	34	27	26.2	26	26	25.2	120
125							33	33	25.4	24.6	24.6	24.6	24.2	125
130							30.6	32	23.8	23	23	23.4	22.6	130
135							29	30.6	22	21.2	21.2	21.6	20.8	135
140								28.4	20	19.2	19.6	19.8	19.6	140
145								26.6	18.2	18.2	18.8	18	18.6	145
150								24.8	17.2	17.6	18	17	17.6	150
155								21.4	16	17	17.2	16	16.8	155
160									15	16.4	16.6	15	15.8	160
165									14	15.8	16	14.4	14.8	165
170									13.2	15.4	15.4	13.8	14	170
175									11.8	14.8	14.8	13	13.2	175
180										14.4	14.2	12.4	12.4	180
185										14	13.8	12	11.8	185
190										13.6	13.2	11.4	11	190
195											12.8	10.8	10.4	195
200											12.2	10.4	9.6	200
205											11.8	9.8	9	205
210												9.4	8.4	210
215												9	8	215
220												8.6	7.4	220
225												7.4	6.8	225
230													6.4	230
235													5.6	235
240													4.8	240

* Over rear with special equipment

Loads greater than 376,000 lb can only be lifted with special equipment.



51.1-262.5 ft



164,200 lbs



28'5''x27'9''



360°



85%

ft	51.1	68.7	86.1	103.4	120.8	138.1	155.9	173.5	191.6	209.5	227.4	245.3	262.5	ft
10	418	352												10
15	348	324	304											15
20	286	276	260	230	182									20
25	240	240	230	217	178	139								25
30	195	196	196	192	178	139	110	84						30
35	163	165	164	162	165	139	110	84	64					35
40		142	141	140	140	134	110	84	64	50	38.8			40
45		122	123	122	120	121	106	84	64	50	38.8	31.6		45
50		107	108	107	105	105	101	81	64	50	38.8	31.6	26.4	50
55			95	94	96	93	94	75	64	50	38.8	31.6	26.4	55
60			85	84	86	83	84	69	64	50	38.8	31.6	26.4	60
65			76	78	78	74	75	64	59	50	38.8	31.6	26.4	65
70			69	71	70	69	68	59	55	50	38.8	31.6	26.4	70
75				65	64	65	62	55	52	48	38.8	31.6	26.4	75
80				59	58	60	56	51	48	45	38.8	31.6	26.4	80
85				54	52	55	52	47	44	42.4	38.8	31.6	26.4	85
90				49	49	50	47	43.2	40.6	39.4	37.2	31.6	26.4	90
95					47	46	43.4	40.4	37.8	36.6	35.4	31.6	26.4	95
100					43.6	42	39.6	38.8	35	34.2	33.4	31.4	26.4	100
105						38.4	36	37.4	32.2	31.6	31.6	30	26.4	105
110						35.4	33.6	35.2	29.4	29	29.4	28.8	26.4	110
115						32.6	32.6	32.4	27	26.6	27	27.4	26.4	115
120						30	31.4	29.8	24.8	24.4	25	25.6	25.2	120
125							30	27.4	22.6	22.6	23.8	23.6	24.2	125
130							27.8	25.4	20.4	21.4	22.2	21.8	22.6	130
135							25.8	23.4	18.4	20	20.8	20.2	20.8	135
140								21.6	17.4	19	19.6	18.6	19.6	140
145								20	16.8	18.2	18.8	17.4	18.2	145
150								18.4	16	17.6	18	16.6	16.8	150
155								17	15.4	17	17.2	15.8	15.6	155
160									15	16.4	16.6	15	14.4	160
165									14.4	15.8	16	14.4	13.2	165
170									14	14.8	14.8	13.8	12.2	170
175									13.4	13.8	13.6	12.8	11	175
180										12.8	12.6	11.8	10	180
185										12.4	11.6	10.8	9	185
190										11.8	10.8	9.8	8	190
195											9.8	9	7.2	195
200											9	8	6.2	200
205											8.6	7.2	5.4	205
210												6.6	4.6	210
215												5.8	4	215
220												5	3.2	220
225												4.4		225

Loads greater than 376,000 lb can only be lifted with special equipment.



51.1-262.5 ft



120,100 lbs



28'5"x27'9"



360°



85

85%

ft	51.1	68.7	86.1	103.4	120.8	138.1	155.9	173.5	191.6	209.5	227.4	245.3	262.5	ft
10	418	352												10
15	344	324	304											15
20	278	276	260	230	182									20
25	219	220	220	217	178	139								25
30	177	180	177	175	164	139	110	84						30
35	145	149	150	145	140	131	110	84	64					35
40		126	126	121	119	111	110	84	64	50	38.8			40
45		108	109	108	102	96	95	84	64	50	38.8	31.6		45
50		95	94	94	88	89	83	77	64	50	38.8	31.6	26.4	50
55			81	82	77	78	73	68	64	50	38.8	31.6	26.4	55
60			73	73	71	69	65	60	57	50	38.8	31.6	26.4	60
65			64	64	66	62	58	53	51	50	38.8	31.6	26.4	65
70			57	57	60	56	52	51	46	44	38.8	31.6	26.4	70
75				51	54	51	46	48	40.8	39.8	38.4	31.6	26.4	75
80				48	48	46	42.6	43.2	36.6	35.8	36	31.6	26.4	80
85				43.8	43.4	41.6	40.8	39.4	32.8	32.8	33.4	31.6	26.4	85
90				39.8	39.2	37.4	39	36	29.6	31	32	31.6	26.4	90
95					35.4	34.4	36.2	32.8	27.8	29.6	30.6	30.6	26.4	95
100					32.2	33.2	33	30	26.4	28.2	29.2	28	25.4	100
105						31.8	30	27.4	25	27	27.4	25.8	23.2	105
110						29.2	27.4	24.8	24	25.8	25.2	23.6	21.2	110
115						26.8	25	22.4	22.8	24.2	23.8	21.6	19.2	115
120						24.6	22.8	20.2	21.4	23	22	20	17.6	120
125							20.8	18.2	19.6	22	19.8	18.2	16	125
130							19	16.4	18.8	20.4	18.8	16.8	14.4	130
135							17.4	14.8	18.2	18.8	17.2	15.4	13	135
140								13.2	17.4	17.2	15.6	14	11.8	140
145								11.8	16	15.8	14.2	12.8	10.6	145
150								10.6	14.8	14.4	13	11.4	9.4	150
155								9.4	14	13.2	11.6	10.2	8.4	155
160									12.8	12	10.6	9	7.2	160
165									11.8	11	9.4	8	6.2	165
170									10.8	10	8.4	7	5.2	170
175									9.8	9	7.6	6	4.2	175
180										8	6.6	5.2	3.4	180
185										7.2	5.8	4.4		185
190										6.4	5	3.6		190
195											4.2	2.8		195
200											3.6			200
205											3			205

Loads greater than 376,000 lb can only be lifted with special equipment.

GI

RG

FL

TT

CD/BT

RTC

CIC

ATC

CC

TCC



51.1-262.5 ft



57,300 lbs



28'5''x27'9''



360°



85

85%

ft	51.1	68.7	86.1	103.4	120.8	138.1	155.9	173.5	191.6	209.5	227.4	245.3	262.5	ft
10	418	352												10
15	330	324	304											15
20	244	246	222	197	182									20
25	185	179	166	159	146	133								25
30	137	137	130	123	114	112	103	84						30
35	101	109	105	99	99	92	84	77	64					35
40		86	87	87	82	77	70	70	61	50	38.8			40
45		69	73	74	70	65	64	60	51	49	38.8	31.6		45
50		58	63	64	60	56	57	52	48	47	38.8	31.6	26.4	50
55			53	54	52	52	49	45	45	43.6	38	31.6	26.4	55
60			45	46	46	47	43.2	38.6	41.4	40.6	36.8	31.6	26.4	60
65			38.4	39.8	41.8	41.4	38	33.8	37.8	35.8	33	30.2	26.4	65
70			33	35	37.6	36.8	33.6	29.4	33.8	31.8	29.2	26.6	23.6	70
75				32.4	33	32.8	29.8	25.8	30.2	28.4	26	23.4	20.6	75
80				28.6	29.2	30.6	27.8	22.6	27	25.4	23	20.6	18	80
85				25.2	25.8	27.2	26.2	19.8	24.2	22.8	20.4	18.2	15.6	85
90				22.4	22.8	24.2	24	17.4	21.8	20.4	18.2	16	13.4	90
95					20.2	21.6	21.4	15	19.6	18.2	16	14	11.4	95
100					18	19.2	19.2	12.8	17.6	16.2	14.2	12.2	9.6	100
105						17.2	17	10.6	15.6	14.6	12.6	10.4	8	105
110						15.4	15.2	9	13.8	13	11	9	6.6	110
115						13.8	13.6	7.2	12.2	11.4	9.6	7.6	5.4	115
120						12.2	12	5.8	10.6	9.8	8.2	6.4	4	120
125							10.6	4.4	9.2	8.4	7	5.2	3	125
130							9.4	3.2	8	7.2	5.8	4.2		130
135							8.2		6.8	6	4.6	3		135
140									5.8	5	3.6			140
145									4.8	4				145
150									4	3.2				150
155									3					155

Loads greater than 376,000 lb can only be lifted with special equipment.



51.1-191.6 ft



15,400 lbs



28'5"x27'9"



360°



85%

ft	51.1	68.7	86.1	103.4	120.8	138.1	155.9	173.5	191.6	ft
10	414	352								10
15	304	288	248							15
20	191	178	165	150	134					20
25	125	124	118	115	106	96				25
30	82	91	92	87	81	77	73	60		30
35	58	68	71	69	66	64	58	58	49	35
40		52	57	55	56	55	47	49	46	40
45		40	45	48	47	46	39	41.4	38.2	45
50		31.2	36.2	40.2	39.6	38.8	32.2	34.8	32	50
55			29.6	33.2	33.4	32.8	26.6	29.4	27	55
60			24.2	27.6	28.4	28	22.2	25	22.8	60
65			19.6	23.2	24.2	24	18.4	21.4	19.2	65
70			16	19.4	20.6	20.6	15.4	18.2	16.4	70
75				16.2	17.4	17.6	12.6	15.6	13.8	75
80				13.4	14.6	15.2	10.2	13.4	11.6	80
85				11.2	12.2	13	8.2	11.2	9.6	85
90				9.2	10.2	11	6.4	9.6	7.8	90
95					8.4	9.2	4.8	8	6.4	95
100					6.8	7.6	3.4	6.6	5	100
105						6.2		5.2	3.8	105
110						4.8		4	2.6	110
115						3.8		3		115
120						2.8				120

Loads greater than 376,000 lb can only be lifted with special equipment.

GI

RG

FL

TT

CD/BT


RTC

CIC

ATC

CC

TCC

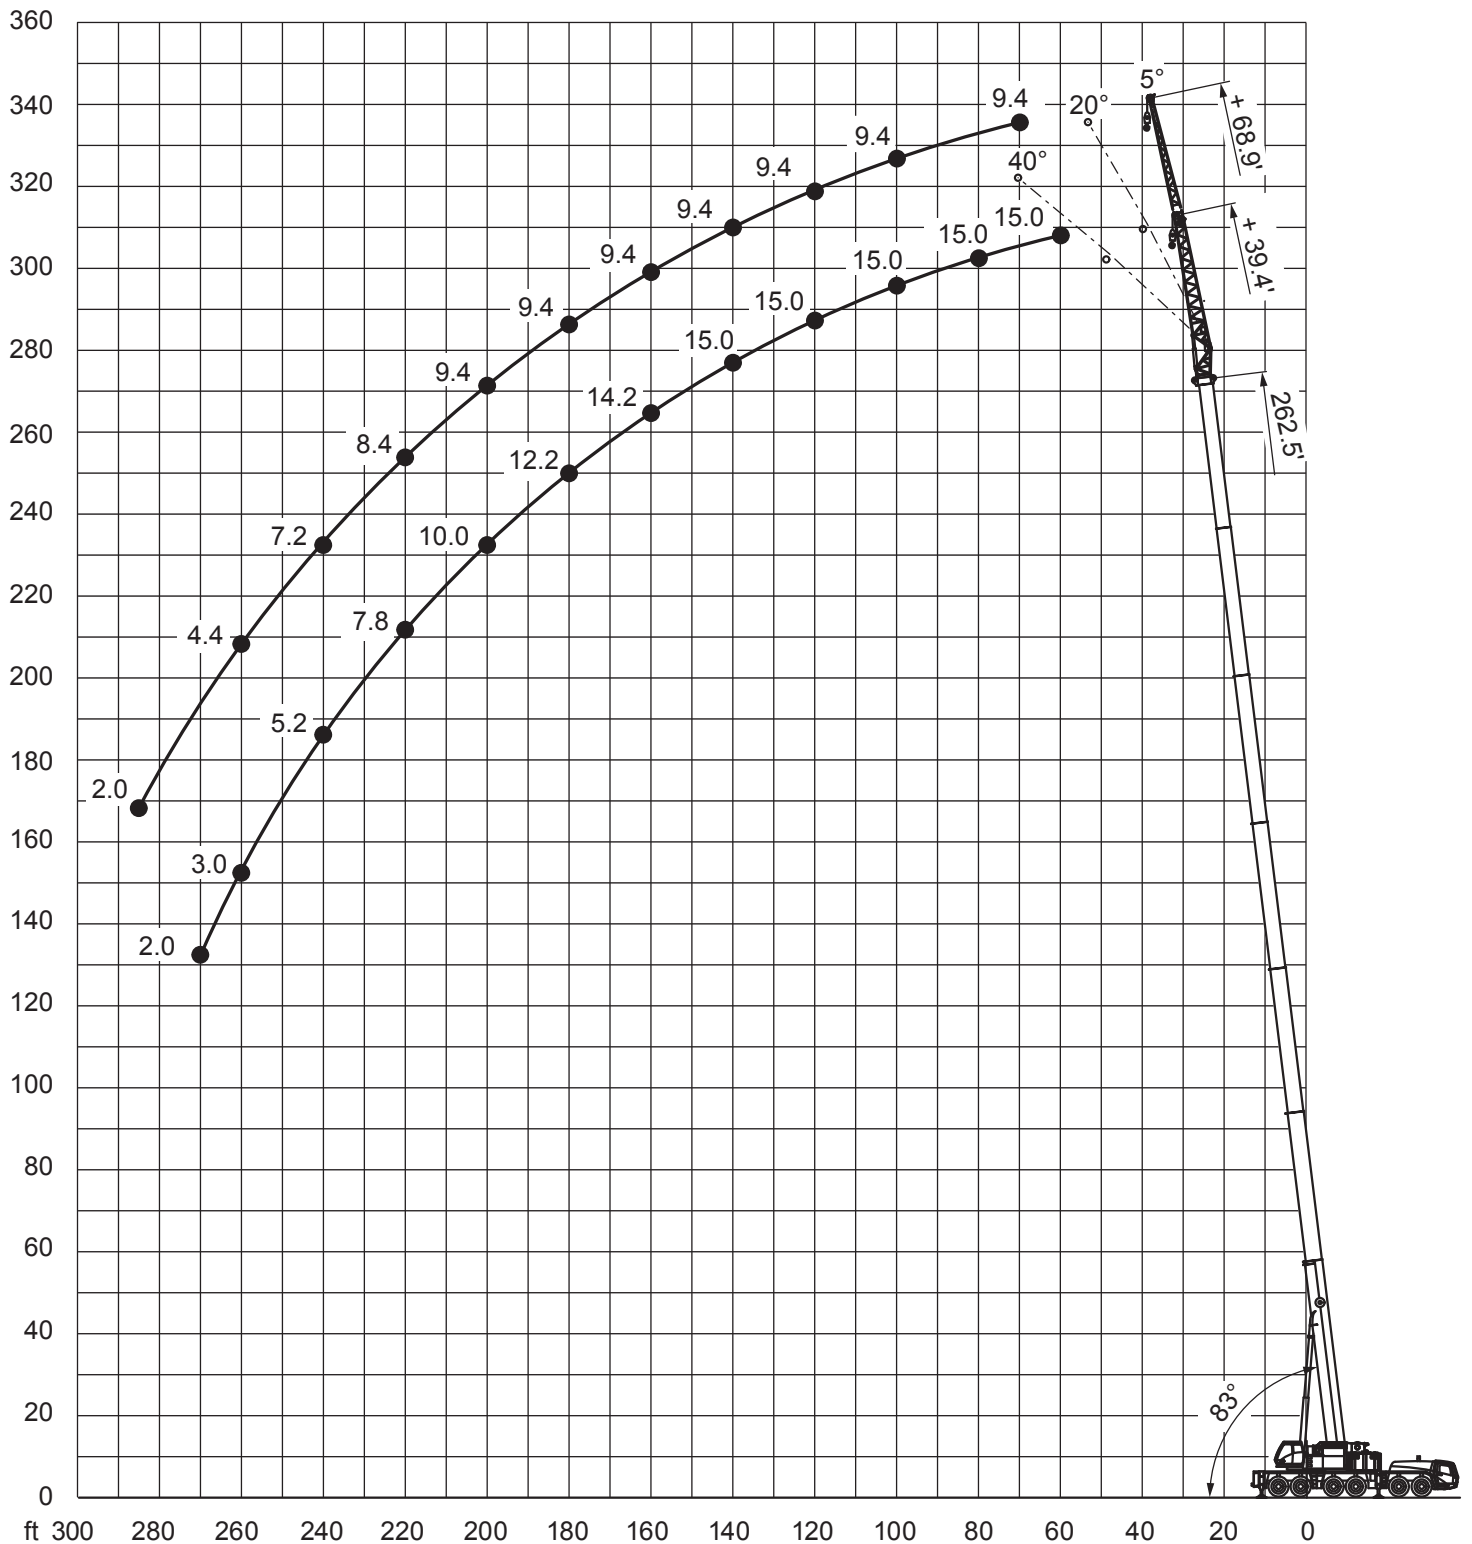



245.3 ft



39.4/68.9 ft



203,900 lbs



28'5"x27'9"



360°



85

85%

ft	5°	39.4 5°-20°	20°-40°	5°	68.9 5°-20°	20°-40°	ft
55	18.6						55
60	18.6	18					60
65	18.6	18					65
70	18.6	18		11			70
75	18.6	18	18	11			75
80	18.6	18	17.8	11	11		80
85	18.6	18	17.6	11	11		85
90	18.6	18	17.6	11	11		90
95	18.6	18	17.4	11	11		95
100	18.6	18	17.2	11	11	9.6	100
105	18.6	18	17.2	11	11	9.4	105
110	18.6	18	17	11	11	9.4	110
115	18.6	18	17	11	10.8	9.2	115
120	18.6	18	16.8	11	10.6	9.2	120
125	18.6	18	16.8	11	10.6	9.2	125
130	18.6	18	16.6	11	10.4	9	130
135	18.4	18	16.6	11	10.2	9	135
140	17.8	17.6	16.4	11	10.2	9	140
145	17	17	16.4	11	10	8.8	145
150	16.2	16.2	16.2	11	9.8	8.8	150
155	15.4	15.4	15.6	11	9.8	8.8	155
160	14.6	14.6	15	11	9.6	8.8	160
165	14	14	14.4	10.8	9.6	8.6	165
170	13.4	13.4	13.6	10.6	9.4	8.6	170
175	12.6	12.6	13	10.4	9.4	8.6	175
180	11.8	11.8	12.4	10.4	9.2	8.6	180
185	11	11	11.6	10.2	9.2	8.6	185
190	10.4	10.4	11	10	9	8.6	190
195	9.6	9.6	10.2	10	9	8.4	195
200	9	9	9.6	9.6	9	8.4	200
205	8.6	8.6	8.8	9.4	8.8	8.4	205
210	8.2	8.2	8.4	9	8.8	8.4	210
215	7.8	7.8	8	8.4	8.4	8.4	215
220	7.4	7.4		7.8	7.8	8.4	220
225	7	7		7.4	7.4	8.2	225
230	6.6	6.6		6.8	6.8	7.6	230
235	6.2	6.2		6.4	6.4	7	235
240	5.8	5.8		6	6	6.6	240
245	5.6	5.6		5.8	5.8		245
250	5.2	5.2		5.4	5.4		250
255	4.8	4.8		5.2	5.2		255
260	4.4			4.8	4.8		260
265				4.6	4.6		265
270				4.2	4.2		270
275				4	4		275
280				3.8	3.8		280
285				3.4	3.4		285

GI

RG

FL

TT

CD/BT

RTC

CIC

ATC

CC

TCC



262.5 ft



39.4/68.9 ft



203,900 lbs



28'5"x27'9"



360°



85

85%

ft	5°	39.4 5°-20°	20°-40°	5°	68.9 5°-20°	20°-40°	ft
60	15	14.8					60
65	15	14.8					65
70	15	14.8		9.4			70
75	15	14.8		9.4			75
80	15	14.8	14.8	9.4	9.4		80
85	15	14.8	14.8	9.4	9.4		85
90	15	14.8	14.8	9.4	9.4		90
95	15	14.8	14.8	9.4	9.4		95
100	15	14.8	14.8	9.4	9.4		100
105	15	14.8	14.8	9.4	9.4	9.4	105
110	15	14.8	14.8	9.4	9.4	9.2	110
115	15	14.8	14.8	9.4	9.4	9.2	115
120	15	14.8	14.8	9.4	9.4	9.2	120
125	15	14.8	14.8	9.4	9.4	9	125
130	15	14.8	14.8	9.4	9.4	9	130
135	15	14.8	14.8	9.4	9.4	9	135
140	15	14.8	14.8	9.4	9.4	8.8	140
145	15	14.8	14.8	9.4	9.4	8.8	145
150	15	14.8	14.6	9.4	9.4	8.8	150
155	14.6	14.6	14.4	9.4	9.4	8.8	155
160	14.2	14.2	14.2	9.4	9.4	8.6	160
165	13.8	13.6	13.6	9.4	9.4	8.6	165
170	13.2	13.2	13.2	9.4	9.4	8.6	170
175	12.4	12.4	12.8	9.4	9.2	8.6	175
180	12	12	12.2	9.4	9.2	8.6	180
185	11.4	11.4	11.8	9.4	9.2	8.4	185
190	10.8	10.8	11.2	9.4	9	8.4	190
195	10.2	10.2	10.6	9.4	9	8.4	195
200	9.6	9.6	10	9.4	8.8	8.4	200
205	9	9	9.6	9.2	8.8	8.4	205
210	8.4	8.4	9	8.8	8.6	8.4	210
215	8	8	8.4	8.6	8.6	8.4	215
220	7.4	7.4	7.8	8.2	8.2	8.4	220
225	6.8	6.8	7.2	7.8	7.8	8	225
230	6.4	6.4		7.4	7.4	7.8	230
235	5.8	5.8		6.8	6.8	7.6	235
240	5.2	5.2		6.4	6.4	7.2	240
245	4.6	4.6		6	6	6.6	245
250	4	4		5.6	5.6	6.2	250
255	3.4	3.4		5	5	5.6	255
260	3	3		4.4	4.4		260
265	2.4	2.4		4	4		265
270	2	2		3.4	3.4		270
275				3	3		275
280				2.4	2.4		280
285				2	2		285



245.3 ft



39.4/68.9 ft



120,100 lbs



28'5"x27'9"



360°



85

85%

ft	5°	39.4 5°-20°	20°-40°	5°	68.9 5°-20°	20°-40°	ft
55	18.6						55
60	18.6	18					60
65	18.6	18					65
70	18.6	18		11			70
75	18.6	18	18	11			75
80	18.6	18	17.8	11	11		80
85	18.6	18	17.6	11	11		85
90	18.6	18	17.6	11	11		90
95	18.6	18	17.4	11	11		95
100	18.6	18	17.2	11	11	9.6	100
105	18.6	18	17.2	11	11	9.4	105
110	18.6	18	17	11	11	9.4	110
115	18	18	17	11	10.8	9.2	115
120	17.4	17	16.8	11	10.6	9.2	120
125	17.4	16.6	16	11	10.6	9.2	125
130	16.2	16.2	15.6	11	10.4	9	130
135	14.8	14.8	15.2	11	10.2	9	135
140	13.6	13.6	14.6	11	10.2	9	140
145	12.4	12.4	13.2	11	10	8.8	145
150	11.2	11.2	12.2	10.6	9.8	8.8	150
155	10.2	10.2	11	10.6	9.6	8.8	155
160	9.2	9.2	10	10.6	9.6	8.8	160
165	8.4	8.4	9	9.8	9.4	8.6	165
170	7.4	7.4	8.2	9	9	8.6	170
175	6.4	6.4	7.2	8.2	8.2	8.6	175
180	5.6	5.6	6.2	7.4	7.4	8.6	180
185	4.6	4.6	5.4	6.6	6.6	7.8	185
190	3.8	3.8	4.4	5.8	5.8	7	190
195	3.2	3.2	3.6	5	5	6.2	195
200	2.4	2.4	3	4.2	4.2	5.4	200
205			2.2	3.6	3.6	4.6	205
210				3	3	4	210
215				2.4	2.4	3.2	215
220						2.6	220
225						2	225

GI

RG

FL

TT

CD/BT

RTC

CIC

ATC

CC

TCC



262.5 ft



39.4/68.9 ft



120,100 lbs



28'5"x27'9"



360°

**85**

85%

ft	5°	39.4 5°-20°	20°-40°	5°	68.9 5°-20°	20°-40°	ft
60	15	14.8					60
65	15	14.8					65
70	15	14.8		9.4			70
75	15	14.8		9.4			75
80	15	14.8	14.8	9.4	9.4		80
85	15	14.8	14.8	9.4	9.4		85
90	15	14.8	14.8	9.4	9.4		90
95	15	14.8	14.8	9.4	9.4		95
100	15	14.8	14.8	9.4	9.4		100
105	15	14.8	14.8	9.4	9.4	9.4	105
110	15	14.8	14.8	9.4	9.4	9.2	110
115	15	14.8	14.8	9.4	9.4	9.2	115
120	15	14.8	14.8	9.4	9.4	9.2	120
125	15	14.8	14.8	9.4	9.4	9	125
130	14	14	14.8	9.4	9.4	9	130
135	12.6	12.6	13.6	9.4	9.4	9	135
140	11.4	11.4	12.4	9.4	9.4	8.8	140
145	10.2	10.2	11.2	9.4	9.4	8.8	145
150	9	9	10	9.4	9.4	8.8	150
155	8	8	9	9.4	9.4	8.8	155
160	7	7	8	8.8	8.8	8.6	160
165	6.2	6.2	7	7.8	7.8	8.6	165
170	5.4	5.4	6	7	7	8.4	170
175	4.6	4.6	5.2	6.2	6.2	7.6	175
180	3.6	3.6	4.4	5.4	5.4	6.8	180
185	2.8	2.8	3.6	4.6	4.6	6	185
190	2	2	2.8	4	4	5.2	190
195			2	3.2	3.2	4.4	195
200				2.6	2.6	3.8	200
205						3	205
210						2.4	210